

ISLAMIC RELIEF BANGLADESH

House # 10, Road # 10, Block # K, Baridhara, Dhaka-1212.



Tender Documents for 09 units PWD Latrine Construction at Camp 2 East & 2 West, Ukhiya Upazila under Cox's Bazar District.

Tender No.	Tender # 14/2026
Package No.	Package # 04 (RFQ # 189/2026)
Issued On	17/08/2026
Last Date and Time for Submission of Tender	Tender will be received up to 11.50 AM on 30/08/2026
Date and Time for Opening of Tender	Tender will be opened on 30/08/2026 at 12.00 PM by the Tender Opening Committee (TOC) at the office of the undersigned with physical or virtual presence of the interested bidders by MS Teams .
MS Teams Meeting ID	361 324 629 636 709
Passcode	jX6is6yF

Please fill the table mentioned below:

Name of Vendor/ Company	
i) Registered Business Address ii) Corporate Address (if different)	
Name of Proprietor/MD with Contact Number	
Name of Contact Person with Contact Number	
Email ID	
Total Bid Security Amount	
PO/DD/BG Number and Date	
Name of Bank	
Name of Branch	

At a glance of offer

SL	Name of items	Specification	Unit	Qty	Unit Price	Total Price	Remarks
01	PWD Latrine Construction	As per attached BOQ & Design	No's	09			
Grand Total =							
(Total Amount in words: BDT.							
For technical clarification, please contact 01755689446 or 01755689447							



Section: A, General Info/IRB Compliances



01	Programme	Humanitarian Crisis Response Programme
02	Delivery Place	Different location of Camp 2E & 2W, Ukhiya Upazila, Cox's Bazar District.
03	Procurement Method	Open Tender
04	Time for Completion of the Works	Work must be completed as per our schedule (1 st to 30 th Sep 2026)
05	Mode of Payment	Through A/C payee cheque or bank transfer.
06	AML & ATF Policy	IR will terminate this agreement without any notice if any supplier is found to be in violation of Anti Money Laundering & Anti-Terrorist Funding policy.
07	Child Protection Policy	IR reserves the right to terminate this agreement without any notice if any vendor is engaging child labours or supporting any forms of illegal practices.
08	Anti-Bribery Policy	IR follows ZERO-TOLERANCE policy for any form of bribery or corruption.
09	Modern Slavery Act:	The international Labour Standards as defined by the ILO (international Labour Organization). Below is a link to the section 26 of the Modern Slavery Act so please familiarise yourselves with this. http://www.legislation.gov.uk/ukpga/2015/30/section/26/enacted
10	Anti-social or Anti-state activity	The Service Provider and Receiver both the parties must respect and uphold the rules and laws of the country, and by no means undermine it whatsoever.
11	Eligibility of the Contractors/Firms to compete in the Tender	This invitation for tenders is open to all eligible tenderers who have: i) Relevant work experience with INGO ii) Up-to-date Business Documents iii) Financial and Organizational capabilities iv) Bank Statements for the last 06 (Six) months
12	Price of Tender Document	Nil
13	Amount of Tender Security	2.5% of total quoted amount
		The vendors expressing their intention to attend from Cox's Bazar can submit pay order or Bank Guarantee (BG) to our Cox's Bazar Office. The said pay order or BG must be submitted between 11:50 AM and 12:00 PM on August 30, 2026. A hard copy of the tender schedule and a photocopy of the pay order/BG must be submitted to our Dhaka Office on or before 11.50 AM, August 30, 2026
14	Tender documents are available	http://islamicrelief.org.bd/tender
15	Name and Address of the Office for Issuing, Opening & Receiving Tenders	IR Bangladesh Country Office, House # 10, Road # 10, Block-K, Baridhara Diplomatic Zone, Dhaka-1212
16	Tender Validity	Tender shall be valid for a period of 45 days after tender opening.
17	Change of Schedule Date & Time	If it is not possible to receive/open the tender on the schedule date for any unavoidable circumstances, the same will be received / opened on the next working date at the same circumstances.
18	Filling in the Tender Documents	Clear with Indelible ink, duly signed and stamped
19	Distribution of Works	IRB has the authority to divide the works among the qualified vendors for risk minimization, healthy competition and faster completion of the works
20	Authority of Rejection	The IR Bangladesh authority reserves the right to accept or reject any or all tenders without assigning any reason whatsoever.



Section: B, Tender Data Sheet



01. GENERAL	
Employer	Islamic Relief Bangladesh
02. TENDER DOCUMENT	
For the clarification of Tender only টেন্ডার সংক্রান্ত তথ্যের জন্য	For clarification of tender's purposes only, the Employer's address is: Attention: Procurement Coordinator Address: IR Bangladesh Country Office, House # 10, Road # 10, Block-K, Baridhara, Dhaka1212, Tel: 02-222299128, 02-222299130, Cell: 01325083748 (Sunday-Thursday, at 09 AM to 05 PM) Email Address: procurement@islamicrelief-bd.org
03. PREPARATION OF TENDERS	
Tender Documents	Documents must be submitted by Tenderers are: a. Up to date copy of Trade License attested by the proprietor/head of organization b. Copy of up-to-date VAT Registration Certificate attested by the proprietor/head of organization c. Up to date copy of TIN/ TIN Certificate attested by the proprietor/head of organization d. Experience Certificate/WO copy with contact info for reference check attested by the proprietor/head of organization e. Clients List attested by the proprietor/head of organization f. Tender Security: PO or BD or BG from any Schedule Bank g. You are requested to provide a forwarding letter on your organization's letterhead pad with seal and signature from the authority with this offer along with duly filled in Summary of Tender Submission as per attached format.
Tender Security	A Tender Security 2.5% of total quoted amount will be required in the form of a Pay Order or Bank Draft or BG in favour of the "ISLAMIC RELIEF" accompanied with each tender
04. SUBMISSION OF TENDERS	
Filling Envelop	The inner and outer envelope shall bear the following additional identification marks: a) The Name of the Tender: c) Tender No: d) RFQ # e) Contractor's/Tenderer's Address: f) Additional documents should not be more than 10 pages excluding our requested documents.
05. AWARD OF CONTRACT	
5.1	The Tender will be Non-Responsive and Rejected if the Quoted Amount of the Tender is found not in accordance with the quality and specifications set out for this tender.
5.2	If mistake is found in the line items or total amount, the IR Bangladesh authority can reject or accept at its own discretion whichever IR Bangladesh deems advantageous or justifiable.
5.3	The amount of performance guaranty (PG) shall be 2.5% of the contract price and the bid bond will be kept as PG of winning bidder(s).
5.4	A. 2% of work order amount will be deducted from your total bill amount for each and every belated day or as per IRB management decision. B. 5% of work order amount will be deducted for any deviation with the given specification in your quotation if supply does not rectify immediately or as per IRB management decision.
06. COMPLAINTS OR SUGGESTIONS	
Complaints or Suggestions অভিযোগ বা পরামর্শ	For any complaints or suggestions: Email: feedback@islamicrelief-bd.org Cell: 017-7777-3701



Section: C, SPECIAL TERMS AND CONDITIONS



01. The rate quoted by the Suppliers should include the cost of all materials and all operational costs connected with the packages and supply, cost of organizational arrangements, capital, background works, planning, logistics arrangements and cost of all local and other VAT & Taxes, Tolls and Incidental Charges will be treated as having been included in the tender bid.
02. All relevant documents supplied duly signed by the tenderer in every page and be binding upon the tenderer
03. Before submitting the tender, the tenderer should study/inquire the entire supply & work thoroughly in consultation with the relevant stakeholders, and no extra claim will be entertained for under any circumstances.
04. The supplied items must be of good quality and as per the samples approved by the IRB Management before delivery.
05. The quantities of the work may vary at the time of execution of work/supply and some items may be increased or decreased or even excluded, and for such cases no additional claims will be entertained.
06. Delivery Time must be maintained as per the schedule strictly. No extension of time will be allowed.
07. The work may be done round the clock which under any circumstances no extra claim will be entertained.
08. No claim from the contractor shall be entertained if the work is not executed for any reason.
09. Claim for advance payment shall not be entertained.
10. The contractor shall have to arrange and bear the expenses of all kinds of tools and plants which may be necessary for this work.
11. No claim for enhancement of rate of any item of the schedule will be entertained due to fluctuation of market rate for labours and materials along with the period of execution of the works.
12. Verbal instructions whatsoever and from whomsoever will have no binding. All such instruction must be in writing from competent authority.
13. The Suppliers/Contractors or his/their representative will have to be available at the site/delivery points to receive instruction from the IRB's designated staffs in connection with the supply/work.
14. Completion of Works shall be as per the Contract Agreement.
15. The Contractor shall submit the first Plan & Schedule of Works by 2 (two) days after signing the Contract, and shall update the progress regular basis during the period of the Contract.
16. In case of fund constrain/inadequate fund/non-availability of fund the payment to be made to the Contractor for completed work in the working financial year may be delayed for which no claim of the contractor shall be accepted. It is therefore assume that the contractor/Agency has agreed to execute this work under this precondition.
17. VAT and other taxes at the rates fixed by the Govt. will be deducted from the bills of the contractor
18. Challan and relevant documents must be submitted along with final bill.
19. Govt. MUSHAK 6.3 must be submitted with the bill.
20. All quotation should be intact at the time of submission.
21. The authority of Islamic Relief reserves the right to accept or reject any or all of the quotations and right to stop supply at any stage of delivery without assigning any reason whatsoever

Tenderer's Signature, Date & Seal	
I/We hereby declare that the information and documents provided along with the bid submission are true and authentic.	
Signature	
Designation	
Date	



Islamic Relief Bangladesh

Ukhiya, Cox's Bazar

BOQ of PWD Latrine Construction (Steel Frame)



SI No.	Description of work	Unit	Qty	Rate	Total Amount
Sub Structure					
1	MS angle short column will be placed in four corner fixed and welded with anchor plate in middle position. Superstructure columns will join with short column by 8 mm nut bolts. Angle size 38 mm (1.5 inch) X 38 mm (1.5 inch) X 3 mm and 305mm (1'-0") Height	Kg	4		-
2	MS angle column will be placed in middle of the front side for locking the door and fixed with floor and roof. This column will not be fixed with anchor plate and Ms short column by using 8 mm dia nut bolts. Angle size 38 mm (1.5 inch) X 38 mm (1.5 inch) X 3 mm and 2007mm (6'-7") Height	Kg	5.36		-
3	MS angle column will be placed two corner side of the front side and 10 mm nut bolts joint with those columns and 305 mm (1'-0") long MS short column and Anchor Bolt by using 8 mm dia nut bolts. Angle size 38 mm (1.5 inch) X 38 mm (1.5 inch) X 3 mm and 1981mm (6'-6") Height.	Kg	10.4		-
4	MS angle column will be placed two corner side of the back/rear side and 10 mm night bolts joint with those columns and 305 mm (1'-0") long MS short column and Anchor Bolt by using 8 mm the nut bolts. Angle size 38 mm (1.5 inch) X 38 mm (1.5 inch) X 3 mm and 1829mm (6'-0") Height.	Kg	10.2		-
5	MS angle rafter will be placed to corners for fixing the roof and will be placed along the door and back side parallel. 4 Nos corner column will be joint with the rafter by 8 mm dia and nutbolts. Angle size 25 mm (1 inch) X 25 mm (1 inch) X 3 mm and 1525mm (5'-0") long.	Kg	5.4		-
6	3 Nos MS angle Purlin will be placed on Rafter by 8 mm dia nut bolts jointing and left/right position parallel. One will be placed above the Rafter in back side of the rafter column; Another will be placed in middle of the rafter and other will be placed from corner. Angle size 25 mm (1 inch) X 25 mm (1 inch) X 3 mm and 1830mm (6'-0") long.	Kg	6.6		-
7	2 Nos Ms angle will be placed two sides for making the door frame. Angle size 25 mm (1 inch) X 25 mm (1 inch) X 3 mm and 1803mm (5'-11") long.	Kg	5.8		-
8	2 Nos Ms angle will be placed two side for making the door frame. One will be placed bottom of the door (38mm/1.5"above from floor) and another will be joined top of the door. Angle size 25 mm (1 inch) X 25 mm (1 inch) X 3 mm and 914mm (3'-0") long.	Kg	3		-
9	MS angle will be placed in front side for sunlight fencing. One will be fixed in 1829 mm (6'-0") from floor height and another will be fixed 1957 mm 6 ft 5 inch from floor height. All joint will be joint by 8 mm dia nut bolts with columns. MS angle size 25 mm X 25 mm X 3 mm and 1524 mm (5'-0") long.	Kg	3.5		-
10	MS Angle will be placed in front side fencing and 2nos. MS flat bar will be used. One will be placed 152 mm 6 inch above of floor and other will be in middle position. All joint will be joint by 8 mm dia nut bolts with columns. MS Angle size 25 mm X 25 mm X 3 mm and 610 mm (2'-0") long.	Kg	1.5		-
11	MS Angle will be placed for fencing and 3nos. MS angle will use in each side fencing. One will be placed 152 mm (6 inch) above of floor. One in middle and other will be placed in top from 1803 mm 5 feet 11 inch floor height. All joint will be joint by 8 mm dia nut bolts with columns. Angle size 25 mm X25 mm X 3 mm and total 4880 mm 16 feet long. Note: (any one of middle flat bar will be replace by MS Angle size 25 mm (1 inch) X 25 mm (1 inch) X 3 mm and 1525mm (5'-0") long for basin setup.	Kg	16.5		-



SI No.	Description of work	Unit	Qty	Rate	Total Amount
12	MS angle will be placed in middle of door for fixing sheet. Joint will be joint by 8 mm dia nut-bolts with door frame. Flat bar size 25 mm X 25 mm X 3 mm and 914 mm 3 feet long in middle of the door frame.	Kg	1.1		-
13	MS angle will be placed by incline of door frame for strengthen the door frame. One will be placed inclined in the below to middle and other will be placed in middle to top. Wall joint will be joint by 8 mm dia nut bolts. MS angle size 25 mm X 25 mm X 3 mm and 1397mm (4'-7") Long.	Kg	3.2		-
14	2nos Iron blue colour sheet will be placed with door frame. One will joint from bellow portion to middle portion and another will be placed from top to middle portion. Iron sheet size 991mm (3'-3") long X 915mm (3'-0") wide.	Sft	19.5		-
15	2nos Iron blue colour sheet will be placed in front side fencing with frame. One will joint from Brick wall below portion to middle portion and another will be placed from top to middle portion. Iron sheet size 991mm (3'-3") long X 610mm (2'-0") wide.	Sft	13		-
16	2nos Iron blue colour sheet will be placed in left side for fencing. One will joint from Brick wall below portion to middle portion and another will be placed from top to middle portion. Iron sheet size 1525mm (5'-0") long X 991mm (3'-3") wide.	Sft	32.5		-
17	2nos Iron blue colour sheet will be placed in right side for fencing. One will joint from Brick wall below portion to middle portion and another will be placed from top to middle portion. Iron sheet size 1525mm (5'-0") long X 991mm (3'-3") wide.	Sft	32.5		-
18	2nos Iron blue colour sheet will be placed in rear/back side for fencing. One will joint from Brick wall below portion to middle portion and another will be placed from top to middle portion. Iron sheet size 1525mm (5'-0") long X 991mm (3'-3") wide.	Sft	32.5		-
19	2nos Iron blue colour sheet will be placed in roof above the purlin. One will joint from backside to middle portion and another will be placed from front to middle portion. Iron sheet size 1601mm (5'-3") long X 991mm (3'-3") wide.	Sft	34.5		-
20	3nos MS hinges will set with door and column. One will set 229 mm (9 inch) above from below frame one will set 1067 mm (3 feet 6 inch) above from below frame and other will be set 76 mm (3 inch) from top edge frame. Hing size 102 mm (4 inch) X 76 mm (3 inch)	Pcs	3		-
21	Rivet will be placed for iron sheet fixing and all rivet will be placed 152 mm (6 inch) C/C. Rivet size 4 mm dia.	Pcs	280		-
22	Rivet will be placed for iron sheet fixing and all rivet will be placed. Rivet size 6.2 mm dia.	Pcs	80		-
23	Nut bolt 2" dia 10mm	Nos	24		-
24	6" Handle with hasbolt made of iron	Nos	2		-
25	Coating: Coating with two layer red oxide and blue color enamel coat.	Sft	50		-
26	Ventilation Mesh as per approved sample.	Sft	2.5		-
27	MS bolt connection work, welding all Steel connection which needed with best quality welding rod etc all complete as per direction of the engineer-in-	Job	1		-

Sub Structure

1	Earthwork in excavation of foundation for steel structure latrine caring and disposing of all excavated materials at a safe distance designated by engineer, all types of soil except rocky, gravelly, organic maintenance proper slope, disposing of all back filling of sides of all excavated materials to a safe distance back filling of sites of original level etc, all complete to the direction of the EIC.	Cft	265		-
2	Sand filling: Sand filling in foundation trenches and plinth with fine local sand and having minimum fineness modulus (FM) of .50 in 150 mm / 75 mm layers, leveling, watering and consolidating each layer by layer up to finished level, etc. All filling completed as per direction of engineer in charge and as per drawing and design.	Cft	20		-



SI No.	Description of work	Unit	Qty	Rate	Total Amount
3	Supply fittings and fixing of 48" RCC ring, 2.5" thickness and 6 mm bar used as reinforcement as per the drawing and instruction of EIC.	Nos	20		-
4	48" Cover slab with mini pocket slab	Pcs	2		-
5	3" RCC Casting Cement concrete work in foundation and floor with Portland cement, sand (Min FM 1.50) and first class /Picked Jhama brick chips 20mm down graded, in/c mixing appropriately, casting, laying, compacting and curing for the requisite period. The mixture proportion of cement sand and aggregate should be 1:2:4. All complete as per the instruction of the EIC/UNHCR.	Cft	4		-
6	3" CC Casting Cement concrete work in Ramp with Portland cement, sand (Min FM 1.50) and first class /Picked Jhama brick chips 20mm down graded, in/c mixing appropriately, casting, laying, compacting and curing for the requisite period. The mixture proportion of cement sand and aggregate should be 1:2:4. All complete as per the instruction of the EIC/UNHCR.	Cft	8		-
7	5" brick work with 1st Class brick.	Sft	7		-
8	12mm thick plaster with NCF	Sft	60		-
9	Upvc pipe 4"dia (Brand: RFL)	Rft	12		-

Others

1	Paddle bin supply & installation inside the Bathing. (Brand: RFL)	Nos	1		-
2	Supply fittings and fixing of 2 Nos SS Grab rail (1.5mm thick) as per the drawing and instruction of EIC.	Nos	2		-
3	Supply fittings and fixing of SS Hand rail (1.5mm thick) inside the Ramp facility as per the drawing and instruction of EIC.	Set	2		-
4	Supply fittings and fixing of SS Hand rail (1.5mm thick) outside of the facility as per the drawing and instruction of EIC.	Rft	16		-
5	Supply fittings and fixing also gap filling of tactile tiles (Size 12" x 12" Thickness 18 mm) outside & inside of the facility as per the drawing and instruction of EIC.	Sft	11		-
6	Supply fittings and fixing of SS basin (12"X15"X6") inside of the facility as per the drawing and instruction of EIC.	Nos	1		-
7	Supply fittings and fixing of SS Soap case inside the facility as per the drawing and instruction of EIC.	Pcs	1		-
8	Solar light system (Suitable Battery, solar panel and sufficient wire for 5W bulb etc.)	Set	1		-
9	Supply fittings and fixing of Visibility nameplate as per approved sample (size: 12" X 18", Materials: PVC board)	Nos	1		-
17	Supply fittings and fixing of best quality commode chair with fittings and pipe connection inside the pit as per instruction of EIC.	Set	1		-
21	1.5" PVC Gas Pipe	Rft	10		-



Water Tank Network

1	Steel Frame: Fabricating, supplying, fitting and fixing of hand washing device frame and basin stand made with 25mmx25mmx3mm M.S angle & 25mmx3mm flat bar including painting, welding, riveting and transporting to the location all completed as per drawing & accepted by the EIC.	Job	1		-
2	Plastic Water Tank: Supplying, fitting and fixing good quality 65 liter plastic tank including 2 nos water tap (Brand: RFL)	Nos	1		-
3	Supplying Fitting and fixing of 3/4" Thread Pipe. Connection Form Water tank to Water tap and basin with necessary materials.	Rft	15		-
4	Supplying, fitting and fixing of good quality 40 mm lock and key.	Nos	1		-
Total Amount for 1 Unit (BDT)					-
Total Amount for 9 Units (BDT)					


Inword:

Suppliers Sign with Seal



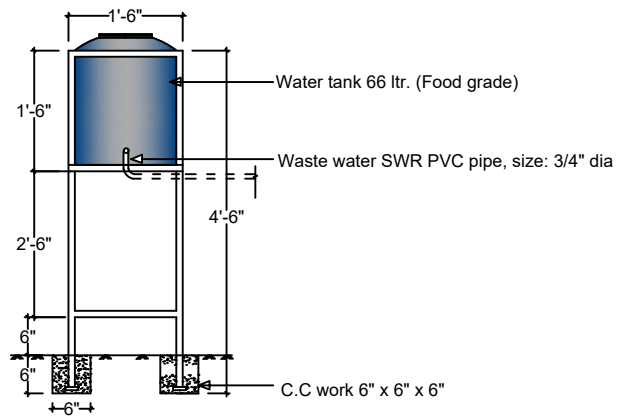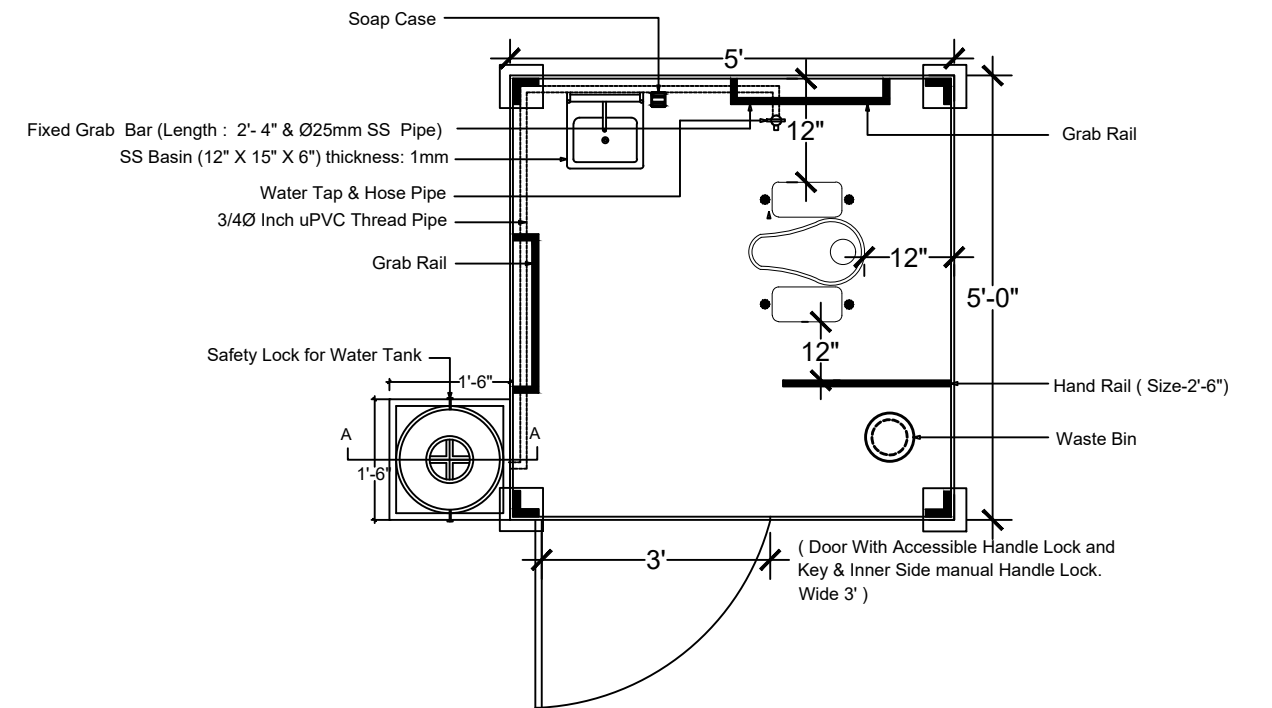

FRONT ELEVATION WATER TANK

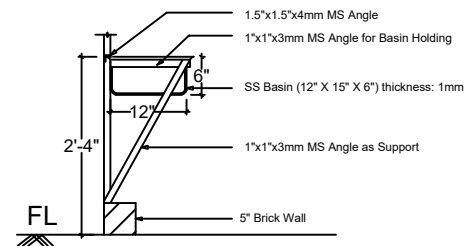

SIDE ELEVATION OF SS BASIN

Implemented By



Name of the work :-

Person with Disability Latrine

Drafted By:

Mahabul Alam & Mohammed Minhazul Alam

Designed By:

Delwar Hosain Al Ruba

Project Officer Technical

Reviewed By:

Eng. Joynul Abedin

Technical Coordinator


Humanitarian Crisis Response Programme

Approved By:


Md. Rashedul Alam

Project Manager
Humanitarian Crisis Response Programme


Page No: 01

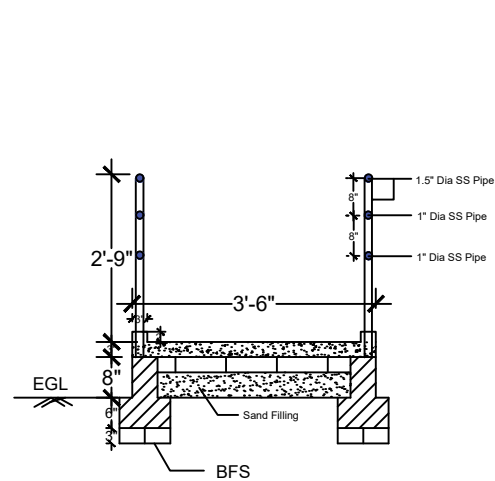

Section A-A

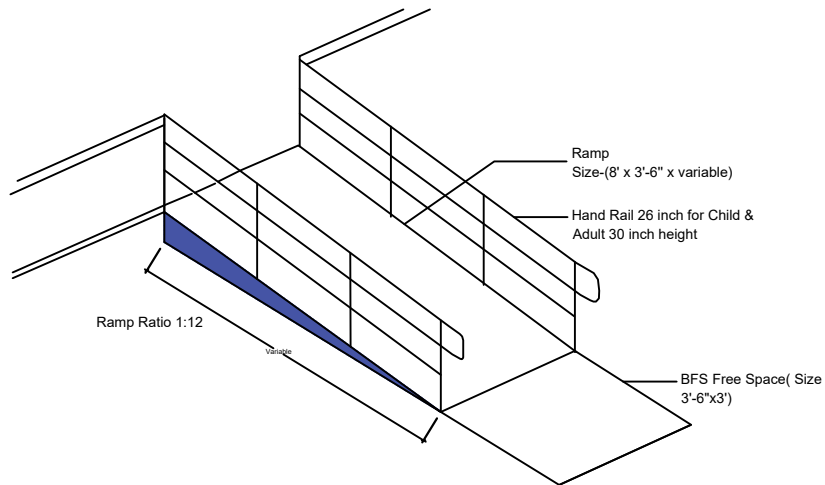

Isometric View of Ramp

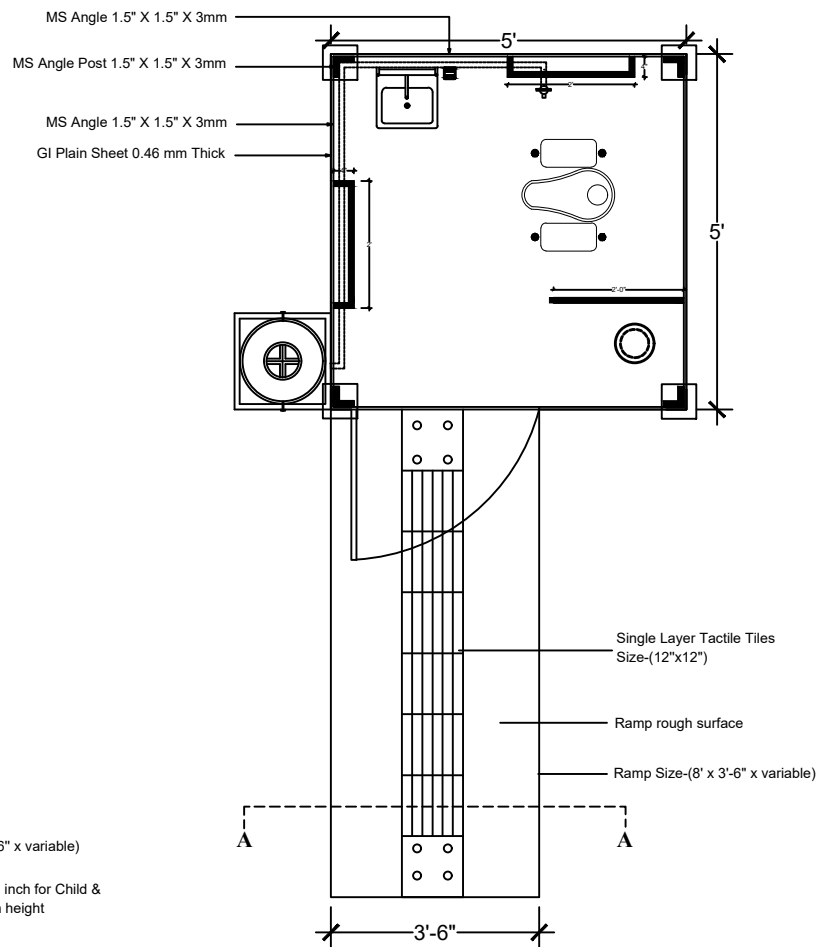

Implemented By



Name of the work :-

Person with Disability
Latrine

Drafted By:

Mahabul Alam &
Mohammed Minhazul Alam

Designed By:

Delwar Hosain Al Ruba

Project Officer Technical

Reviewed By:

Eng.Joynul Abedin

Technical Coordinator


Humanitarian Crisis Response
Programme

Approved By:


Md.Rashedul Alam

Project Manager
Humanitarian Crisis Response
Programme


Page No: 02

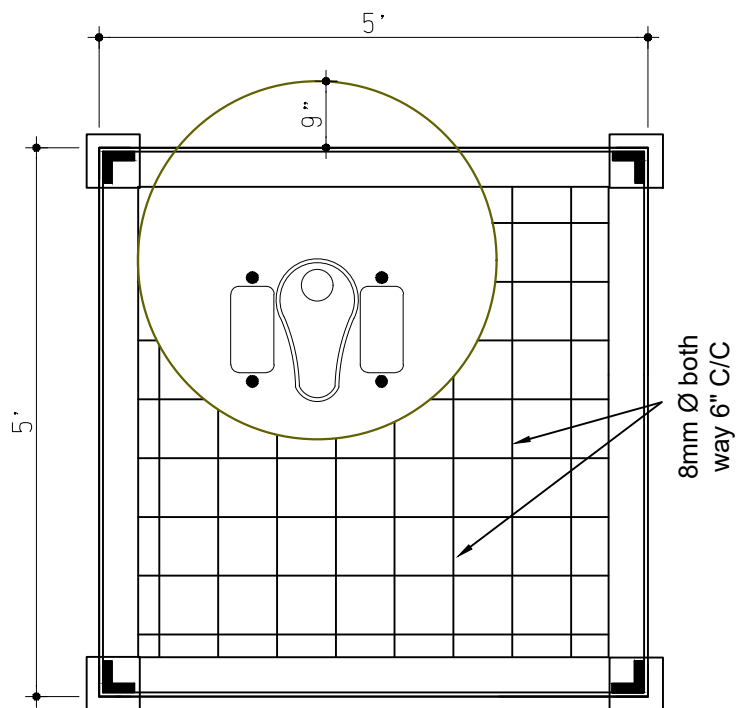

**Section: Reinforcement
Details of Slab**

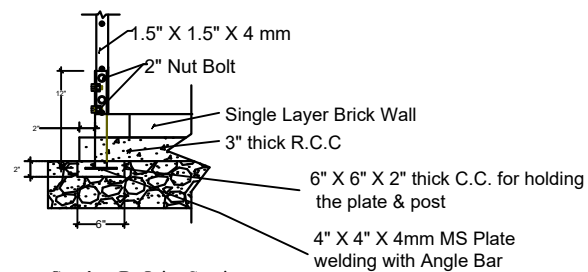

Section P: Joint Section

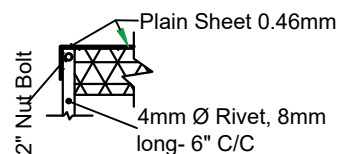

Section Z: Plain Sheet 0.46mm
for roof & fixed with rivet

Implemented By



Name of the work :-

Person with Disability Latrine

Drafted By:

Mahabul Alam & Mohammed Minhazu
Alam

Designed By:

Delwar Hosain Al Ruba

Project Officer Technical

Reviewed By:

Eng. Joynul Abedin

Technical Coordinator


Humanitarian Crisis Response
Programme

Approved By:

Md. Rashedul Alam

Project Manager
Humanitarian Crisis Response
Programme

Page No: 03

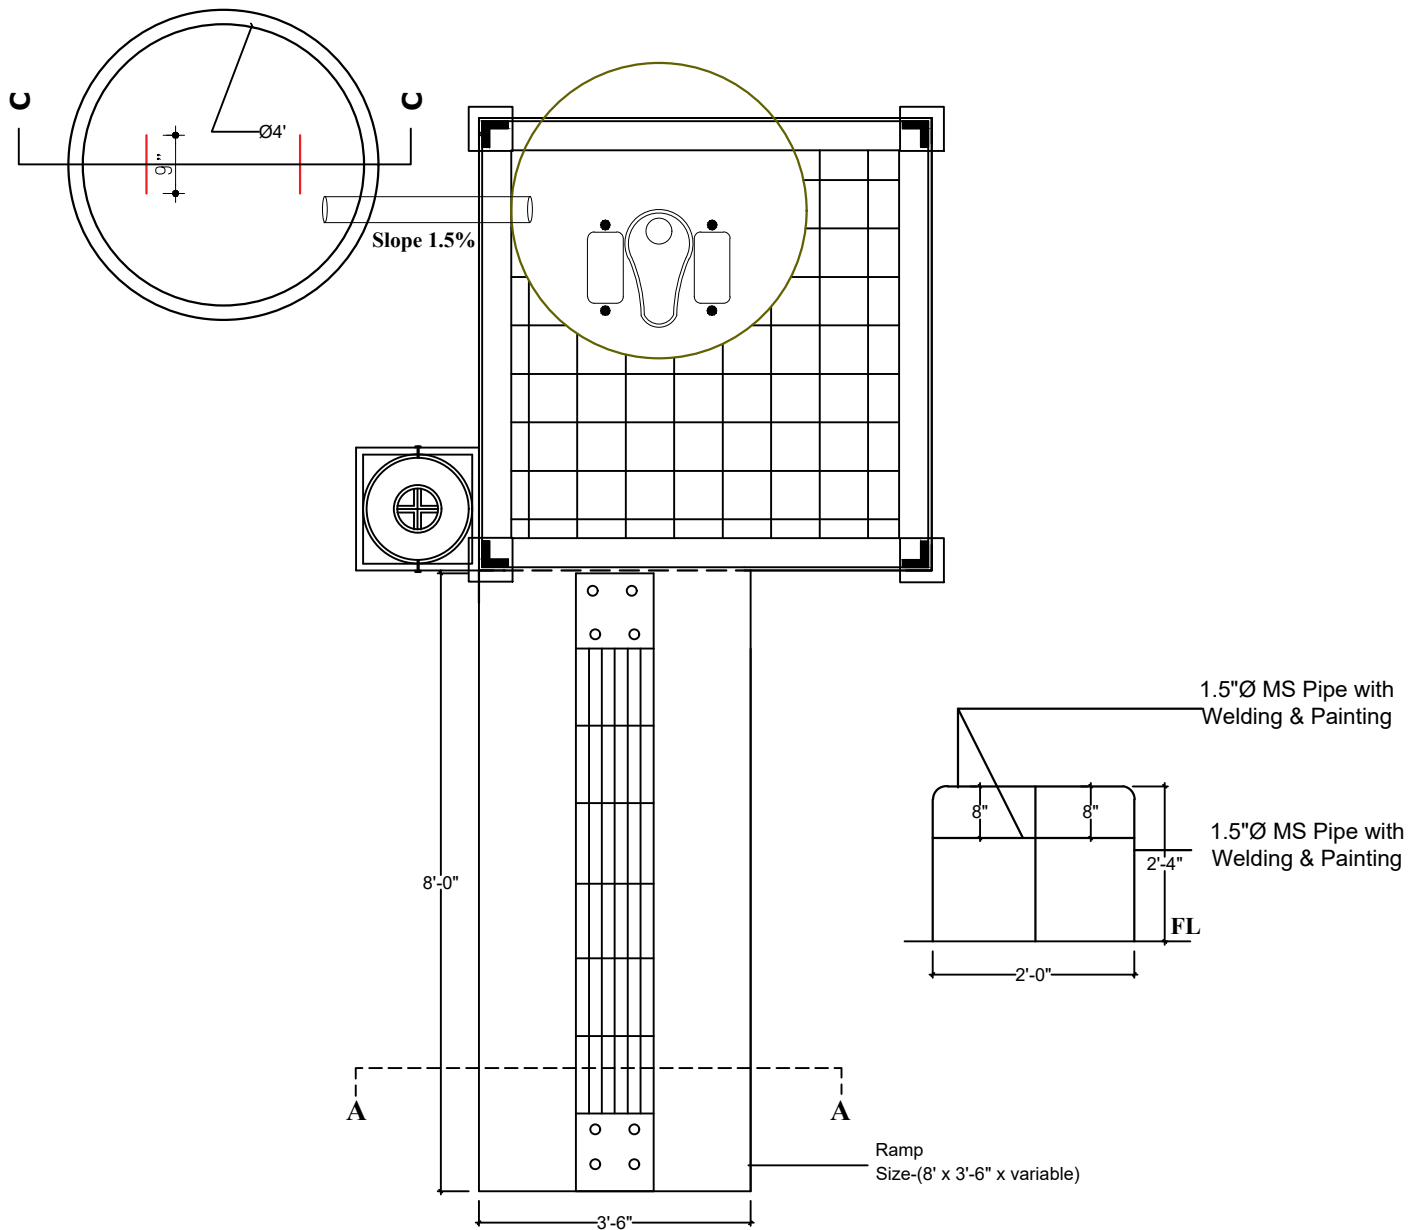

PLAN OF LATRINE WITH TWIN PIT (STEEL FRAME)

Implemented By



Name of the work :-

Person with Disability Latrine

Drafted By:

Mahabul Alam & Mohammed
Minhazul Alam

Designed By:

Delwar Hosain Al Ruba

Project Officer Technical

Reviewed By:

Eng.Joynul Abedin

Technical Coordinator

Humanitarian Crisis Response
Programme

Approved By:

Md.Rashedul Alam

Project Manager
Humanitarian Crisis Response
Programme

Page No: 04

Implemented By



Name of the work :-

Person with Disability Latrine

Drafted By:

Mahabul Alam & Mohammed Minhazu Alam

Designed By:

Delwar Hosain Al Ruba

Project Officer Technical

Reviewed By:

Eng.Joynul Abedin

Technical Coordinator



Humanitarian Crisis Response Programme

Approved By:


Md.Rashedul Alam

Project Manager
Humanitarian Crisis Response Programme


Page No: 05

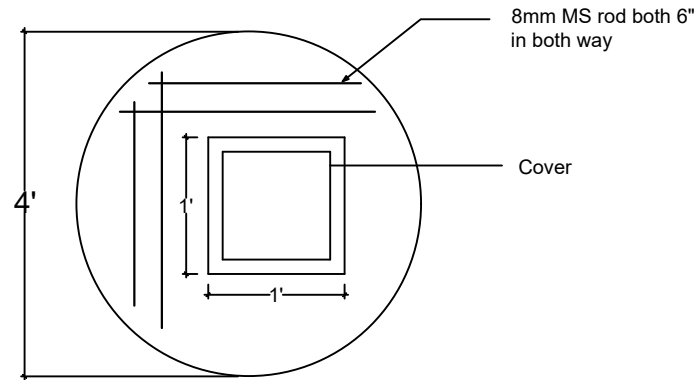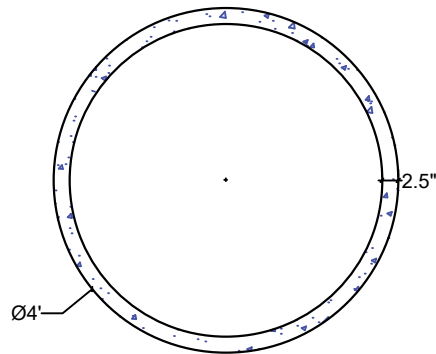


Rod placement for cover slab

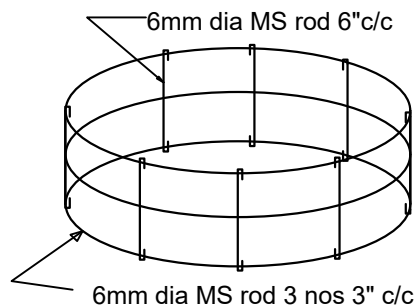


Rod placement for Ring

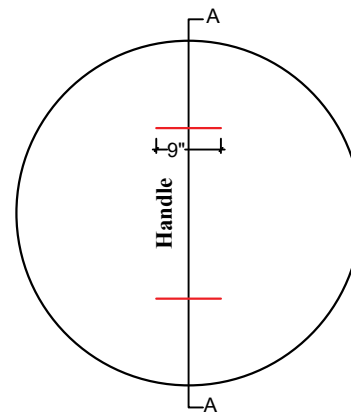

Plan: Top Slab of Ring

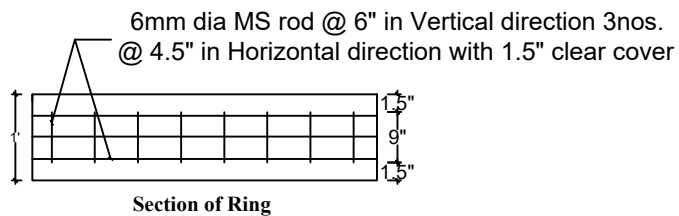

Section of Ring

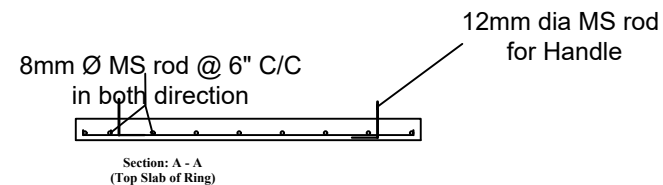

Section: A - A
(Top Slab of Ring)

Implemented By



Name of the work :-

Person with Disability Latrine

Drafted By:

Mahabul Alam & Mohammed Minhazu Alam

Designed By:

Delwar Hosain Al Ruba

Project Officer Technical

Reviewed By:

Eng. Joynul Abedin

Technical Coordinator


Humanitarian Crisis Response Programme

Approved By:


Md. Rashedul Alam

Project Manager
Humanitarian Crisis Response Programme


Page No: 06

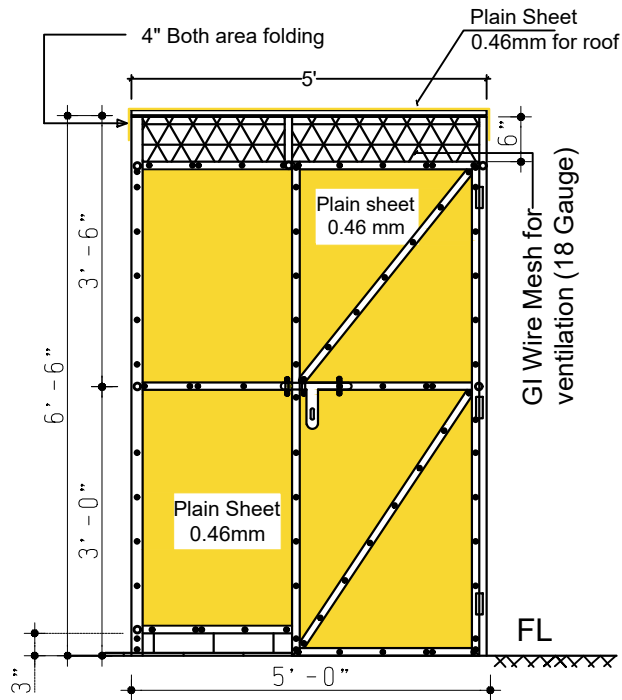

Front Elevation

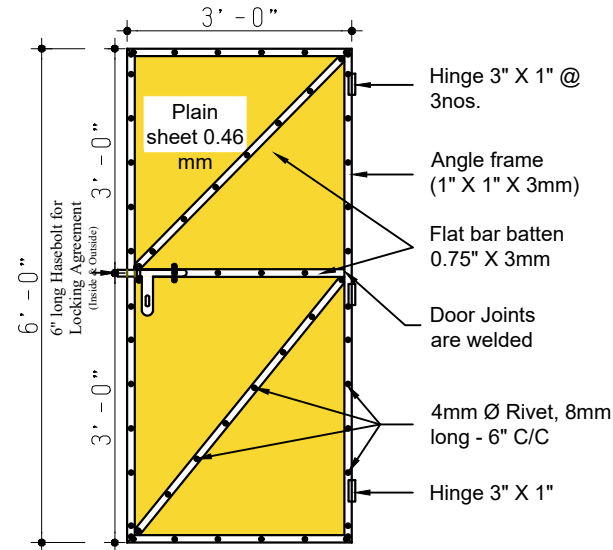

Door Elevation

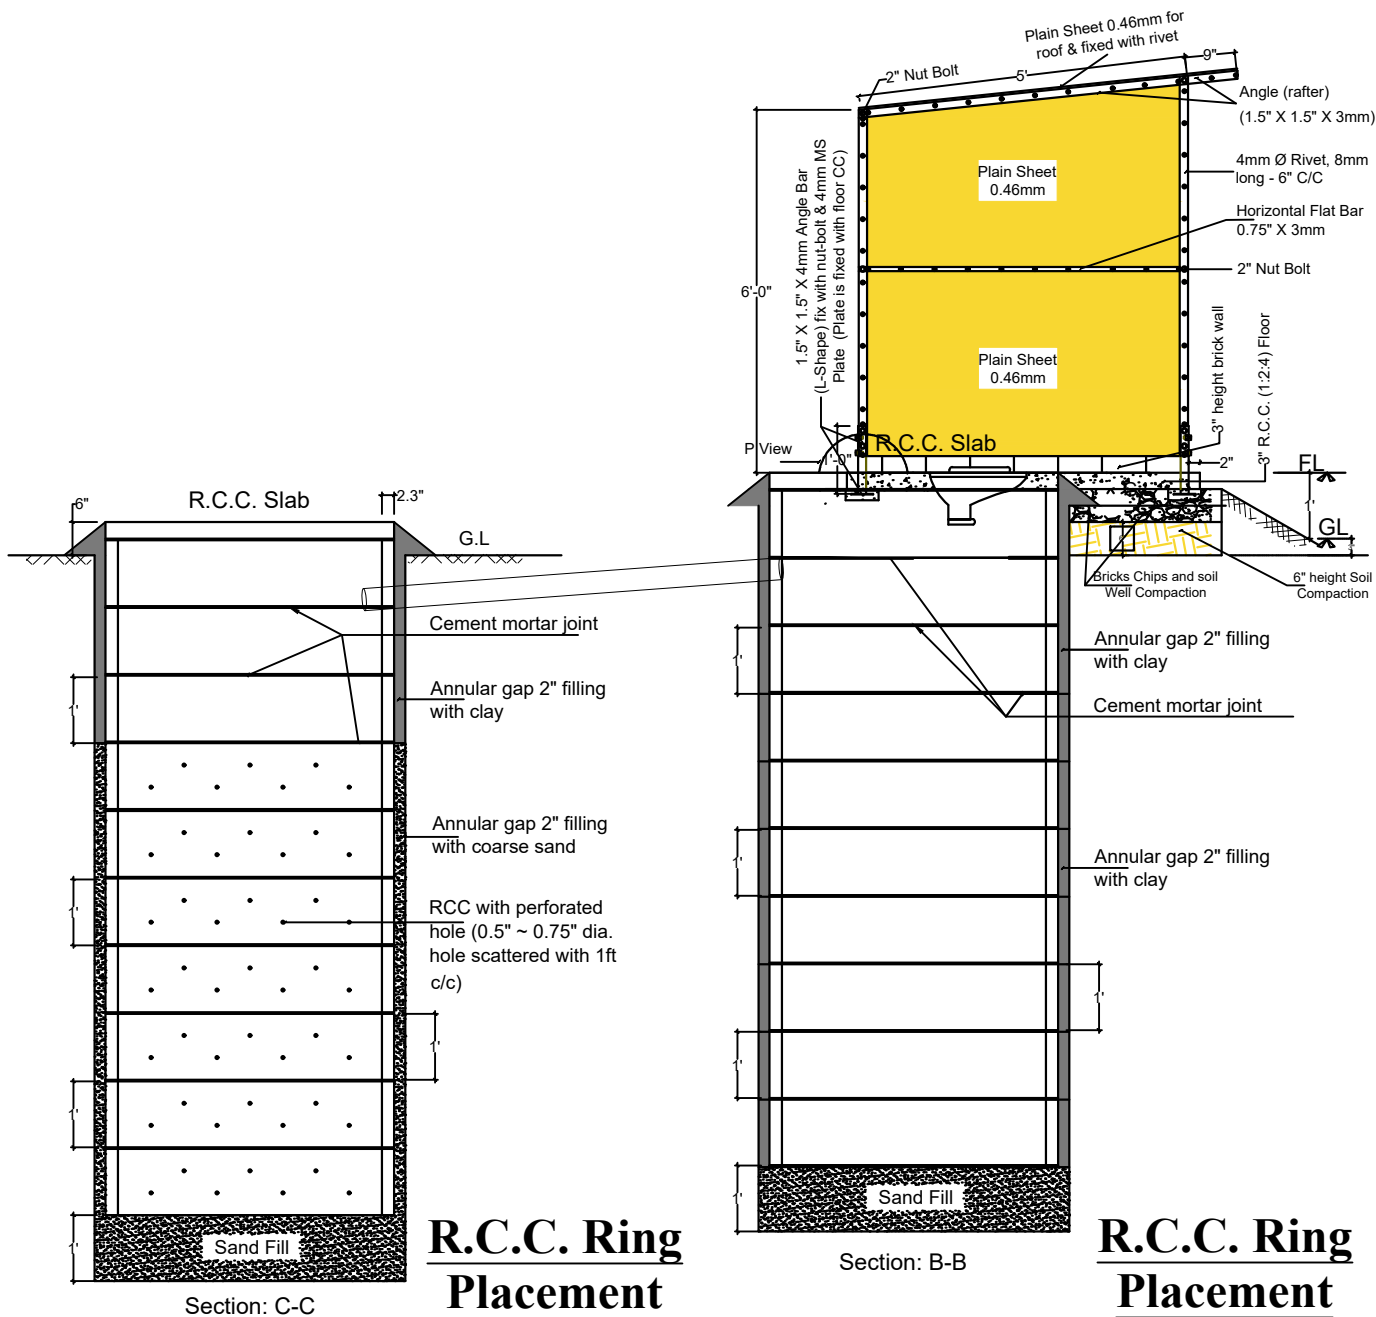

Implemented By



Name of the work :-

Person with Disability Latrine

Drafted By:

Mahabul Alam & Mohammed Minhazul Alam

Designed By:

Delwar Hosain Al Ruba

Project Officer Technical

Reviewed By:

Eng. Joynul Abedin

Technical Coordinator

Humanitarian Crisis Response


Programme

Approved By:

Md. Rashedul Alam

Project Manager
Humanitarian Crisis Response Programme

Page No: 07

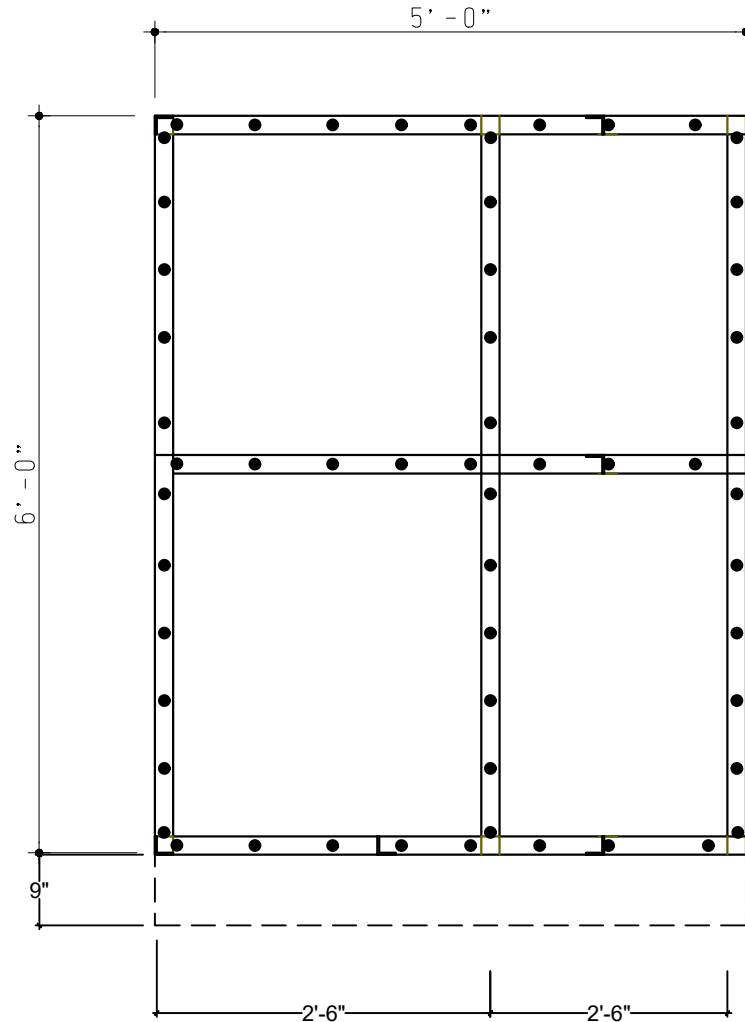

Roof View

Implemented By



Name of the work :-

Person with Disability Latrine

Drafted By:

Mahabul Alam & Mohammed Minhazu Alam

Designed By:

Delwar Hosain Al Ruba

Project Officer Technical

Reviewed By:

Eng.Joynul Abedin

Technical Coordinator

Humanitarian Crisis Response Programme

Approved By:

Md.Rashedul Alam

Project Manager
Humanitarian Crisis Response Programme

Page No: 08